# PLAT OF SURVEY

# SITE DEVELOPMENT PLAN

## ABBREVIATIONS

| SURVEY | | DEVELOPMENT | |
|---|---|---|---|
| N | NORTH | EX. | EXISTING |
| S | SOUTH | PR. | PROPOSED |
| E | EAST | AB. | AS-BUILT |
| W | WEST | | |
| NE | NORTHEASTERLY | OAE | OR APPROVED EQUAL |
| NW | NORTHWESTERLY | | |
| SE | SOUTHEASTERLY | FF: | FINISHED FLOOR ELEVATION |
| SW | SOUTHWESTERLY | T/F: | TOP OF FOUNDATION ELEVATION |
| | | GF: | GARAGE FLOOR ELEVATION |
| S. | SET | M.E. | MATCH EXISTING GRADE ELEVATION |
| F. | FOUND | | |
| SIR | SET IRON REBAR WITH SMIERCIAK IDENTIFICATION CAP | T/W: | TOP OF WALL ELEVATION |
| | | B/W: | BOTTOM OF WALL ELEVATION |
| FIR | FOUND IRON REBAR | T/P: | TOP OF PIPE ELEVATION |
| FIP | FOUND IRON PIPE | B/P: | BOTTOM OF PIPE ELEVATION |
| CROSS | ETCHED CROSS IN CONCRETE | INV: | INVERT ELEVATION OF PIPE |
| M.A.G. | MAGNETIC NAIL | BOT: | BOT OF STRUCTURE ELEVATION |
| MON | SECTION MONUMENT | TOP: | TOP OF CASTING ELEVATION |
| | | MH | MANHOLE |
| (TEXT IN PARENTHESIS SPECIFIES NAME / COMPANY ON FOUND MONUMENT ID CAP) | | CB | CATCH BASIN |
| | | RCP | REINFORCED CONCRETE PIPE |
| R.O.W. | RIGHT-OF-WAY | HDPE | HIGH DENSITY POLYETHYLENE PIPE |
| P.O.B. | POINT OF BEGINNING | DIP | DUCTILE IRON PIPE |
| P.O.C | POINT OF COMMENCEMENT | PVC | POLYVINYL CHLORIDE PIPE |
| PC | POINT OF CURVATURE | CMP | CORRUGATED METAL PIPE |
| PT | POINT OF TANGENCY | CPP | CORRUGATE PLASTIC PIPE (SINGLE WALL) |
| (P) | PLATTED DISTANCE/BEARING | | |
| (C) | CALCULATED DISTANCE/BEARING | AC | AIR CONDITIONING UNIT |
| | | CCP | COVERED CONCRETE PORCH |
| (M) | MEASURED DISTANCE/BEARING | COV | COVERED |
| (D) | DEEDED DISTANCE/BEARING | CONC | CONCRETE |
| | | ASP | ASPHALT |
| L= | ARC LENGTH EQUALS | WW | BASEMENT WINDOW WELL |
| R= | ARC RADIUS EQUALS | EW | BASEMENT EGRESS WELL |
| CH= | ARC CHORD EQUALS | FOH | FRAMED OVERHANG |
| | | ETP | ELECTRIC TRANSFORMER PAD |
| SF | SQUARE FEET | TG | TREE GRATE |
| AC | ACRE | WST | DETECTABLE WARNING SURFACE TILE |

## DEVELOPMENT NOTES

1. PROPOSED FINISH FLOOR ELEVATION (FF) RELATION TO PROPOSED TO TOP OF FOUNDATION ELEVATION (TF) TO BE SHOWN AS INDICATED ON ARCHITECTURAL PLANS. FF SHOWN ON SITE DEVELOPMENT PLAN IS APPROXIMATE.
2. PROPOSED GARAGE FLOOR ELEVATION (GF) TO BE A MINIMUM OF 0.67' LOWER THAN THE PROPOSED TOP OF FOUNDATION (TF) UNLESS NOTED OTHERWISE.
3. FINISHED DIRT/CONCRETE GRADE TO BE A MINIMUM OF 0.67' LOWER THAN PROPOSED TOP OF FOUNDATION ELEVATION (TF) ALONG PROPOSED RESIDENCE.
4. GRADING OF THIS PROPERTY WAS BASED UPON EXISTING TOPOGRAPHIC INFORMATION AND ADDRESSES OVERLAND STORM WATER FLOWS ONLY. AN APPROVED GRADING PLAN WAS AVAILABLE FOR SUBJECT PARCEL. NO SOILS OR GEOTECHNICAL INFORMATION WAS PROVIDED BY THE BUILDER. WE WOULD RECOMMEND THAT SOIL BORINGS BE TAKEN TO DETERMINE IF THE UNDERLYING SOILS ARE SUITABLE FOR SUPPORT AND PROTECTION OF THE PROPOSED STRUCTURE.
5. A MAXIMUM SLOPE OF 4:1 (H:V) WAS MAINTAINED ON THIS PLAN AND SHALL BE GRADED TO THAT MAXIMUM SLOPE UNLESS NOTED OTHERWISE.
6. PERMISSION FOR ANY PROPOSED OFF-SITE GRADING MUST BE OBTAINED FROM ADJACENT PROPERTY OWNERS. ANY AND ALL OFF-SITE DISTURBED AREAS ARE TO BE RESTORED TO EXISTING CONDITIONS OR BETTER, AS NECESSARY.
7. PRIOR TO EXCAVATION, CALL INDIANA 811 AT 1-800-382-5544. THIS DOCUMENT DOES NOT ANY SHOW BURIED UTILITIES. EXISTING BURIED UTILITIES MUST BE FIELD VERIFIED PRIOR TO EXCAVATION.

## SURVEY NOTES

1. DIMENSIONS ARE NOT TO BE ASSUMED OR SCALED.
2. BASIS OF BEARINGS: HOLDING THE WESTERLY LINE OF LOT 22 AT S 8° 22' 43" W, AS PER THE RECORDED PLAT OF SUBDIVISION.
3. NO TITLE COMMITMENT OR ABSTRACT WAS PROVIDED TO THE SURVEYOR FOR THE USE OF THIS SURVEY. THERE MAY EXIST OTHER DOCUMENTS OF RECORD WHICH COULD AFFECT THIS PARCEL,

## SURVEYOR'S CERTIFICATE

I, ANTHONY JON SMIERCIAK, DO HEREBY CERTIFY THAT A LAND SURVEY HAS BEEN MADE UNDER MY SUPERVISION OF THE ABOVE DESCRIBED PROPERTY AND THAT THE PLAT HEREON DRAWN IS A REPRESENTATION OF SAID SURVEY. TO THE BEST OF MY KNOWLEDGE AND BELIEF THIS SURVEY WAS EXECUTED ACCORDING TO THE SURVEY REQUIREMENTS AS STATED IN TITLE 865 IAC 1-12 (RULE 12). DISTANCES ARE SHOWN IN FEET AND DECIMAL PARTS THEREOF.

THE INFORMATION CONTAINED ON THIS PLAT IS DESIGNED FOR THE SOLE BENEFIT OF THE OWNER/CLIENT. WE ASSUME NO LIABILITY WHATSOEVER FOR THE UNAUTHORIZED USE OR REUSE OF THIS DOCUMENT.

DATE FIELDWORK COMPLETED: MARCH 12, 2026
DATE OF PLAT: MARCH 25, 2026

ANTHONY JON SMIERCIAK
INDIANA REGISTERED LAND SURVEYOR NO. LS22400014

ANTHONY JON SMIERCIAK REGISTERED No. LS22400014 STATE OF INDIANA LAND SURVEYOR

S:\JOBS\2026\26-124\DWG\26-124.dwg 2026-03-25 5:07 PM

## LEGAL DESCRIPTION

LOT 22 IN OAKBROOK - PHASE 2, AS PER PLAT THEREOF, RECORDED IN PLAT BOOK 118, PAGE 20, IN THE OFFICE OF THE RECORDER OF LAKE COUNTY, INDIANA.

## FLOOD ZONE STATEMENT

THE ACCURACY OF ANY FLOOD HAZARD DATA SHOWN ON THIS REPORT IS SUBJECT TO MAP SCALE UNCERTAINTY AND TO ANY OTHER UNCERTAINTY IN LOCATION OR ELEVATION ON THE FLOOD INSURANCE RATE MAP. (FIRM). ALL OF THE WITHIN DESCRIBED LAND DOES LIE IN ZONE X UNSHADED "AREAS DETERMINED TO BE OUTSIDE OF THE 0.2% ANNUAL CHANCE FLOODPLAIN" BASED ON GRAPHIC PLOTTING ONLY, USING THE FIRM FLOOD INSURANCE RATE MAP FOR LAKE COUNTY, INDIANA, MAP NUMBER 18089C0239E WITH AN EFFECTIVE DATE OF JANUARY 18, 2012.

NORTH

0 ½" 1"
0 10' 20'
SCALE: 1" = 20'

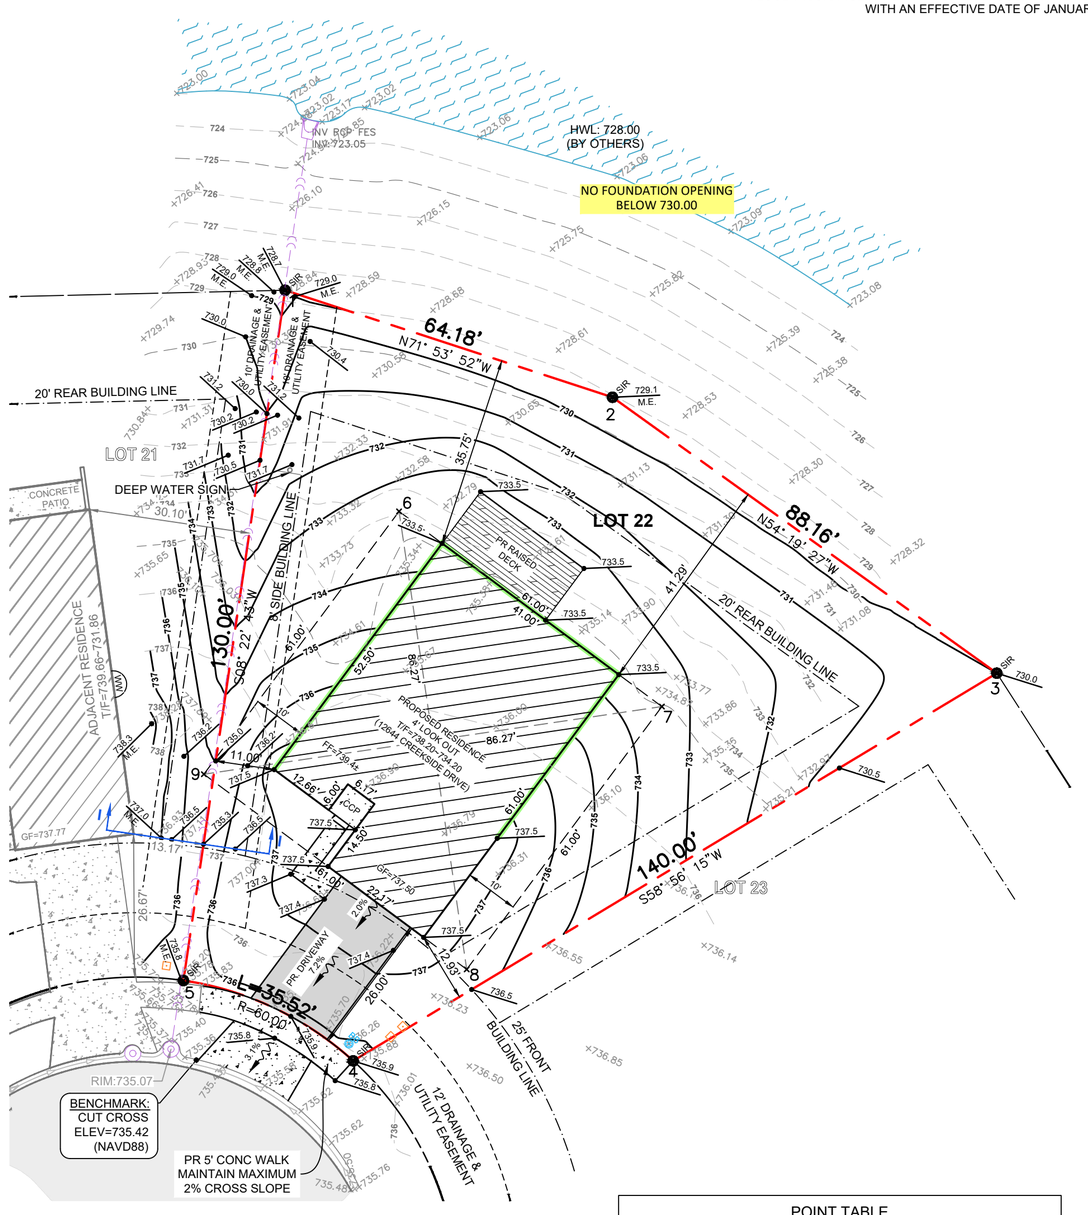


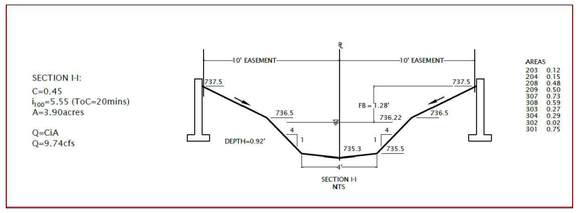


## POINT TABLE

| POINT # | DESCRIPTION | ELEVATION | NORTHING | EASTING |
|---|---|---|---|---|
| 1 | LOTX | 0.00 | 2237154.49 | 2847462.26 |
| 2 | LOTX | 0.00 | 2237134.54 | 2847523.26 |
| 3 | LOTX | 0.00 | 2237083.13 | 2847594.87 |
| 4 | LOTX | 0.00 | 2237010.89 | 2847474.95 |
| 5 | LOTX | 0.00 | 2237025.86 | 2847443.31 |
| 6 | 10' O/S BLD ENV T/F= | 738.20 | 2237113.27 | 2847483.49 |
| 7 | 10' O/S BLD ENV T/F= | 738.20 | 2237076.91 | 2847532.46 |
| 8 | 10' O/S BLD ENV T/F= | 738.20 | 2237027.93 | 2847496.10 |
| 9 | 10' O/S BLD ENV T/F= | 738.20 | 2237064.30 | 2847447.12 |

## MARKER DETAIL

ALL MONUMENTS SHALL BE SET WITH BLUE IDENTIFICATION CAPS / METAL IDENTIFICATION WASHERS AS DEPICTED:

SMIERCIAK FIRM#0198

Indiana811

Know what's below. Call before you dig.
To Submit a Locate Request
24 Hours a Day, Seven Days a Week:
Call 811 or 800-382-5544
www.Indiana811.org

## SURVEYOR'S REPORT

THEORY OF LOCATION:

THIS SURVEY IS A RETRACEMENT SURVEY OF THE SUBJECT PARCEL, AND THE LOCATION OF THE PARCEL LINES ARE BASED ON FOUND MONUMENTATION IN OAKBROOK - PHASE 2, RECORDED IN PLAT BOOK 118, PAGE 20.

THE FOLLOWING DOCUMENTS WERE USED IN THE COURSE OF THIS SURVEY:

- THE RECORDED SUBDIVISION PLAT OF OAKBROOK - PHASE 2, RECORDED IN PLAT BOOK 118, PAGE 20.

THE FOLLOWING MONUMENTS WERE USED FOR THIS SURVEY:

FOUND MONUMENTATION FROM OAKBROOK - PHASE 2 FIT WELL WITH RECORDED DIMENSIONS AND WERE HELD FOR THIS SURVEY. IF NOTHING WAS FOUND, NEW MONUMENTS WERE PLACED AT THE CORNERS TO REPRESENT THE RESULTS OF THIS SURVEY.

AVAILABILITY AND CONDITION OF REFERENCED MONUMENTS:

UNLESS OTHERWISE STATED ON THE PLAT, FOUND MONUMENTS WERE UNDISTURBED, IN GOOD CONDITION, OF UNKNOWN ORIGIN, AND AT OR NEAR GRADE.

OCCUPATION OR POSSESSION LINES:

THERE WERE NO OCCUPATION OR POSSESSION LINES OBSERVED DURING THE COURSE OF THIS SURVEY.

CLARITY OR AMBIGUITY OF THE RECORD DESCRIPTION USED AND OF ADJOINERS' DESCRIPTIONS AND THE RELATIONSHIP OF THE LINES OF THE SUBJECT TRACT WITH ADJOINERS' LINES:

THERE WERE NO ISSUES SEEN WITH THE SUBJECT OR ADJOINER PARCELS.

RELATIVE POSITIONAL ACCURACY:

THE RELATIVE POSITIONAL ACCURACY FOR THIS SURVEY MEETS THE REQUIREMENTS OF AN "SUBURBAN SURVEY", PER TITLE 865 IAC 1-12-7. THE ALLOWABLE RELATIVE ACCURACY, PER THE RULE FOR THIS SURVEY WAS WITHIN THE ALLOWABLE (0.13 FEET PLUS 100 PARTS PER MILLION).

## LEGEND

- PROPERTY LINE
- ROAD CENTERLINE
- RIGHT-OF-WAY
- UNDERLYING OR ADJACENT PROPERTY LINE
- BUILDING SETBACK LINE
- EASEMENT
- SILT FENCE
- PR. BRICK/SIDING LEDGE OR STEPPED FOUNDATION
- PROPOSED RETAINING WALL
- EXISTING CONTOURS
- PROPOSED CONTOURS
- EXISTING CURB FLOWLINE
- EXISTING SWALE
- PROPOSED SWALE
- PROPOSED GRADE
- PROPOSED FLOW ARROW
- PROPOSED CONCRETE OR ASPHALT DRIVEWAY
- PROPOSED CONCRETE
- SIR — SET MONUMENTATION w/ (SMIERCIAK ID CAP)
- FIR (NAME) — FOUND MONUMENTATION w/ (NAME ON ID CAP)
- EXISTING STORMWATER PIPE
- EXISTING STORMWATER CATCHBASIN
- EXISTING STORMWATER FLARED END SECTION
- BB — EXISTING WATER SERVICE SHUT-OFF VALVE (BBOX)
- EXISTING UTILITY PEDESTAL

## ATTENTION

THE CONTRACTOR SHALL VERIFY BUILDING DIMENSIONS WITH ARCHITECTURAL PLANS. IF ANY DISCREPANCY IS NOTED ON THE PLOT PLAN OR ON CONSTRUCTION LAYOUT THE CONTRACTOR SHALL CONTACT THE SURVEYOR TO RESOLVE THE DIFFERENCE.


PREPARED BY:

SMIERCIAK CONSULTING
CIVIL ENGINEERING | LAND SURVEYING
Smierciak Land Surveying, LLC
116 East Joliet Street
Schererville, IN 46375
P: 219.227.8733
www.sm-co.com


REVISIONS:

| NO. | REVISION DESCRIPTION | DATE |
|---|---|---|
| 1 | - | - |
| 2 | - | - |
| 3 | - | - |
| 4 | - | - |
| 5 | - | - |
| 6 | - | - |
| 7 | - | - |

SHEET INFORMATION:

SHEET TITLE: PLAT OF SURVEY / SITE DEVELOPMENT PLAN

CLIENT: SCHILLING CONSTRUCTION
SITE ADDRESS: 12644 CREEKSIDE DRIVE, CEDAR LAKE, IN 46303
ZONING: PUD, TOWN OF CEDAR LAKE
PARCEL INFO: 45-15-21-102-013.000-014 , LAKE COUNTY, INDIANA, 12038 SF = 0.276 AC

PLAN INFORMATION:

| | |
|---|---|
| PAPER SIZE: | ARCH C 24"X18" |
| SECTION: | 21-T34N-R09W |
| COUNTY: | LAKE, IN |
| DESIGNED BY: | AJS |
| DRAWN BY: | MBE |
| FIELD BOOK: | - / - |
| JOB NO: | 26-124 |

SHEET NUMBER:

1 of 1