WHILE EVERY ATTEMPT HAS BEEN MADE IN PREPARATION OF THIS PLAN TO AVOID MISTAKES, S.L.R. DRAFTING SERVICE CAN NOT GUARANTEE AGAINST HUMAN ERROR. THE CONTRACTOR AND OWNER MUST CHECK ALL DIMENSIONS, DETAILS, AND JOB SITE CONDITIONS AND BE RESPONSIBLE FOR THEM. WRITTEN DIMENSIONS WILL TAKE PRECEDENCE OVER SCALED DIMENSIONS, S.L.R. DRAFTING SERVICE SHALL NOT BE HELD RESPONSIBLE FOR CONSTRUCTION METHODS OR MEANS BY THE CONTRACTOR AND/OR/ ANY SUBCONTRACTOR AND THEIR TRADESMAN.

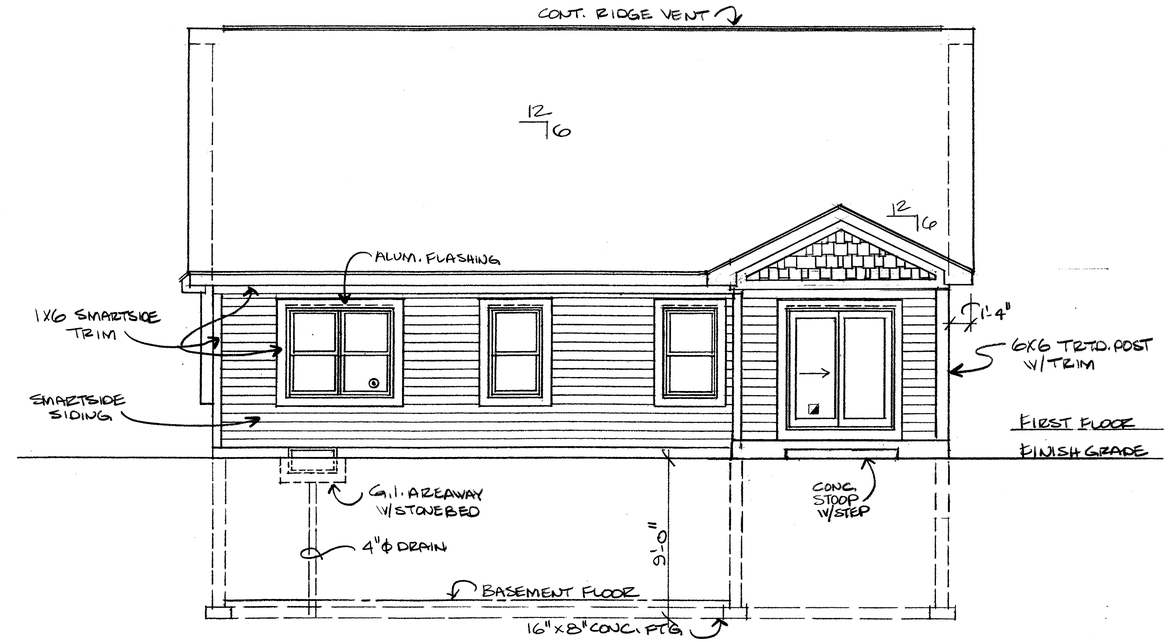

REAR ELEVATION
SCALE: 1/4"=1'-0"

EGRESS WINDOW
TEMPERED SAFETY GLASS

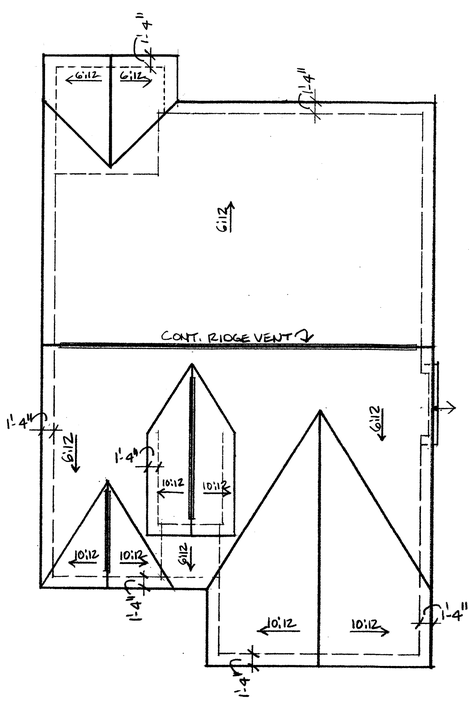

ROOF LAYOUT
SCALE: 1/8"=1'-0"

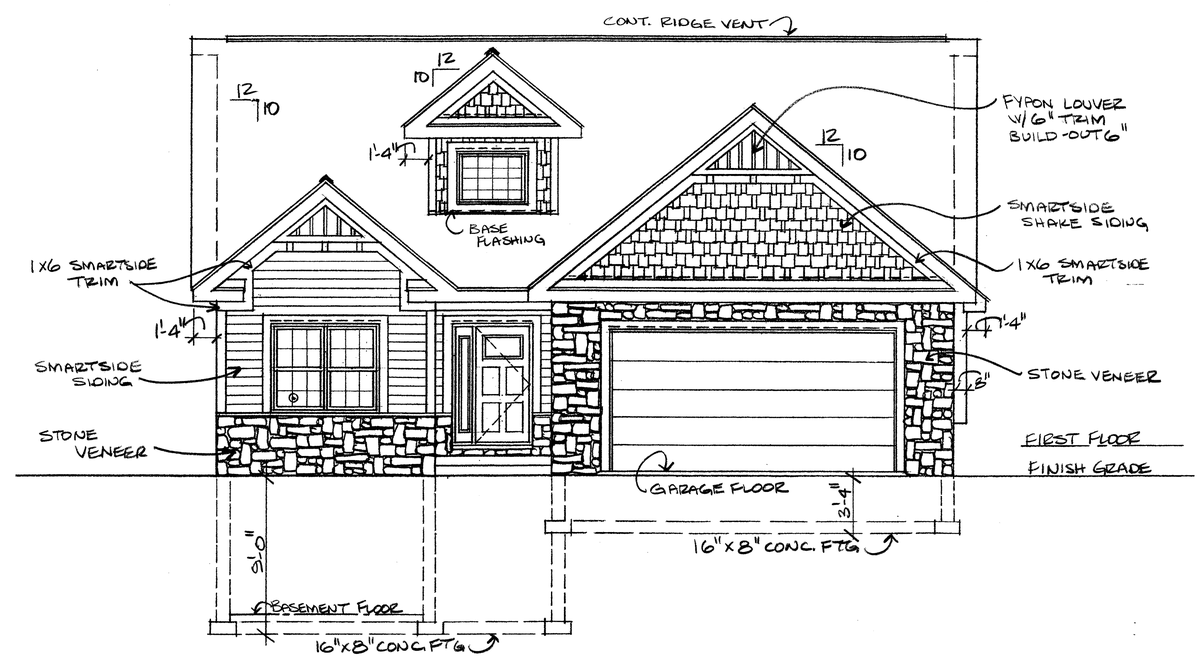

FRONT ELEVATION
SCALE: 1/4"=1'-0"

REVISIONS	BY
6-14-23	SLR
6-20-23	SLR
6-24-23	SLR
6-28-23	SLR
7-8-23	SLR

S.L.R DRAFTING SERVICE
RESIDENTIAL HOME DESIGN, ADDITIONS & REMODELS
Sharon L. Roach
slrdraftingservice94@gmail.com
Office: (219) 987-7358 Cell: (219) 242-1530

OAK BROOK OF CEDAR LAKE, IN
COTTAGE HOMES
GARAGE RIGHT - 3 BEDROOM - BASEMENT

PREPARED FOR:
SCHILLING CONSTRUCTION

DRAWN	SLR
CHECKED	
DATE	6-5-2023
SCALE	SHOWN
JOB NO.	2320-R
SHEET	A-1
OF	5 SHEETS

WHILE EVERY ATTEMPT HAS BEEN MADE IN PREPARATION OF THIS PLAN TO AVOID MISTAKES, S.L.R. DRAFTING SERVICE CAN NOT GUARANTEE AGAINST HUMAN ERROR. THE CONTRACTOR AND OWNER MUST CHECK ALL DIMENSIONS, DETAILS, AND JOB SITE CONDITIONS AND BE RESPONSIBLE FOR THEM. WRITTEN DIMENSIONS WILL TAKE PRECEDENCE OVER SCALED DIMENSIONS, S.L.R. DRAFTING SERVICE SHALL NOT BE HELD RESPONSIBLE FOR CONSTRUCTION METHODS OR MEANS BY THE CONTRACTOR AND/OR/ ANY SUBCONTRACTOR AND THEIR TRADESMAN.

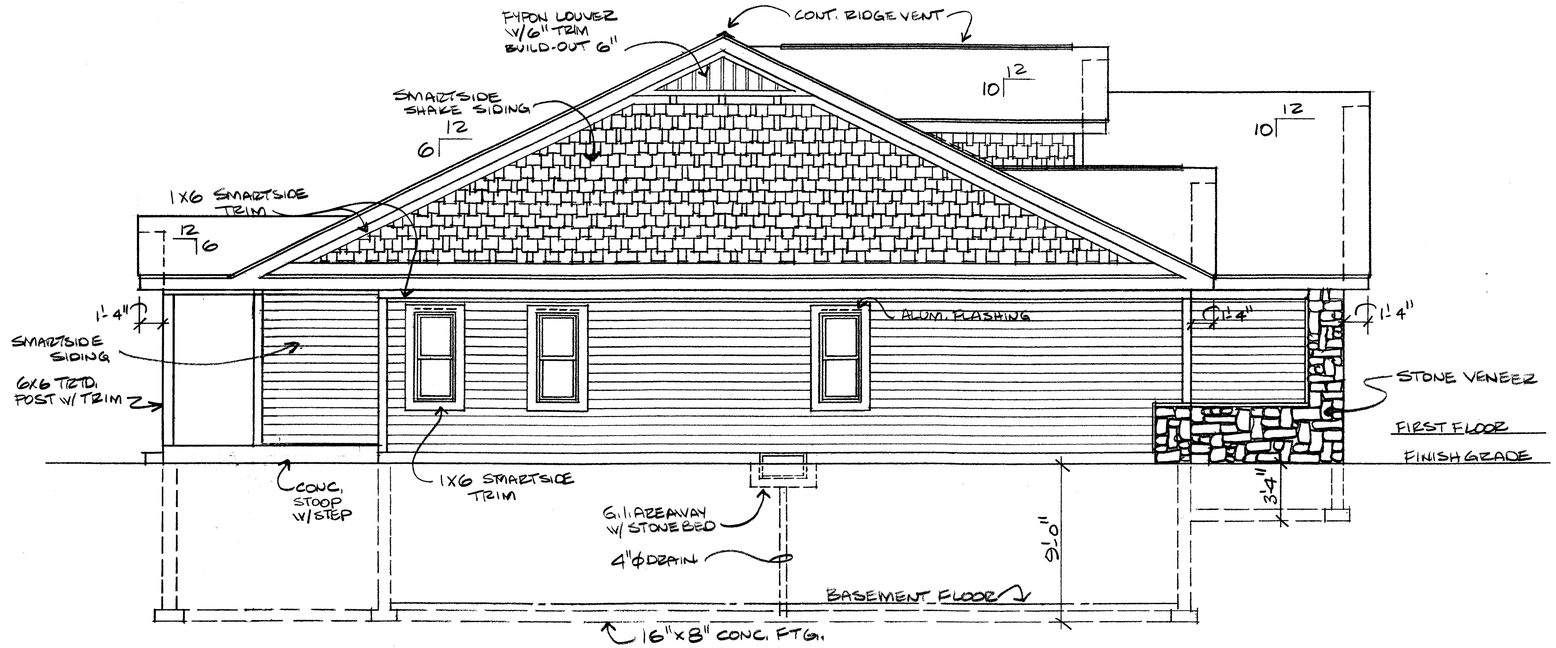

LEFT ELEVATION
SCALE: 1/4"=1'-0"

EGRESS WINDOW
TEMPERED SAFETY GLASS

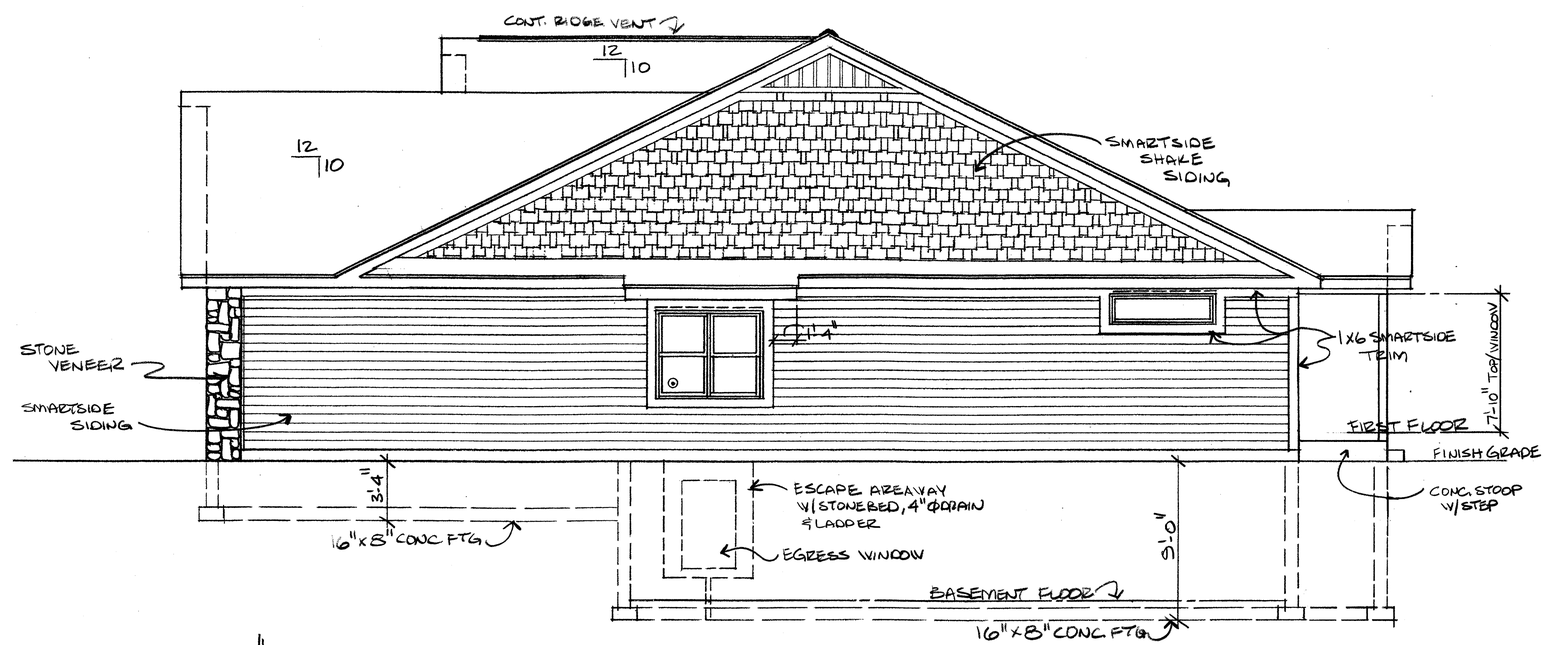

RIGHT ELEVATION
SCALE: 1/4"=1'-0"

REVISIONS	BY
6-14-23	SLR
6-20-23	SLR
6-24-23	SLR
6-28-23	SLR
7-8-23	SLR

S.L.R DRAFTING SERVICE
RESIDENTIAL HOME DESIGN, ADDITIONS & REMODELS
Sharon L. Roach
slrdraftingservice96@gmail.com
Office: (219) 987-7339 Cell: (219) 242-1530

OAK BROOK OF CEDAR LAKE, IN
COTTAGE HOMES
GARAGE RIGHT - 3 BEDROOM - BASEMENT

PREPARED FOR:
SCHILLING CONSTRUCTION

DRAWN	SLR
CHECKED	
DATE	6-5-2023
SCALE	SHOWN
JOB NO.	2320-R
SHEET	A-2
OF	5 SHEETS

WHILE EVERY ATTEMPT HAS BEEN MADE IN PREPARATION OF THIS PLAN TO AVOID MISTAKES, S.L.R. DRAFTING SERVICE CAN NOT GUARANTEE AGAINST HUMAN ERROR. THE CONTRACTOR AND OWNER MUST CHECK ALL DIMENSIONS, DETAILS, AND JOB SITE CONDITIONS AND BE RESPONSIBLE FOR THEM. WRITTEN DIMENSIONS WILL TAKE PRECEDENCE OVER SCALED DIMENSIONS, S.L.R. DRAFTING SERVICE SHALL NOT BE HELD RESPONSIBLE FOR CONSTRUCTION METHODS OR MEANS BY THE CONTRACTOR AND/OR/ ANY SUBCONTRACTOR AND THEIR TRADESMAN.

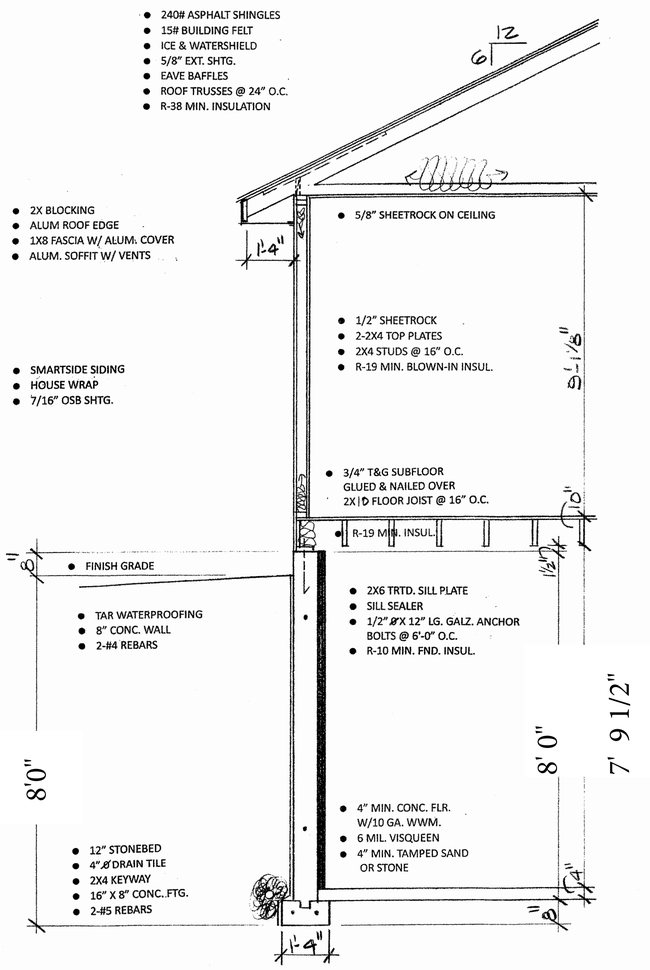

A/3 WALL SECTION
SCALE: 1/2" = 1' -------- 0"

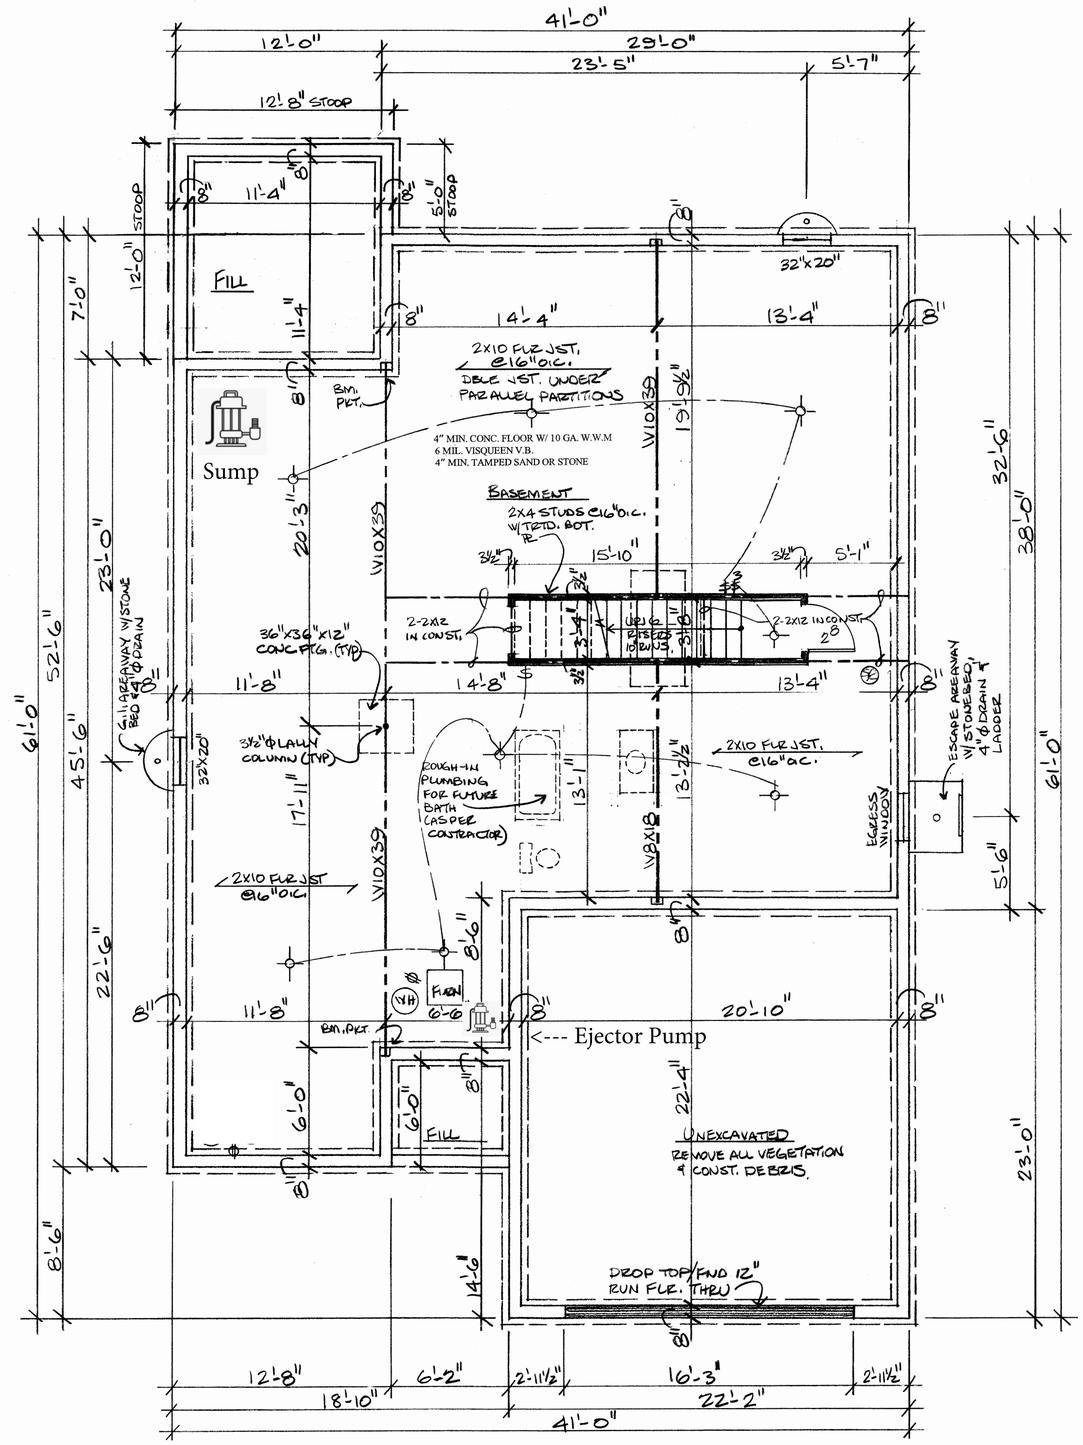

FOUNDATION PLAN
SCALE: 1/4" = 1' ---------- 0"

REVISIONS	BY
6-14-23	SLR
6-20-23	SLR
6-24-23	SLR
6-28-23	SLR
7-8-23	SLR

S.L.R DRAFTING SERVICE
RESIDENTIAL HOME DESIGN, ADDITIONS & REMODELS
Sharon L. Rauch
slrdrafting-rauch-94@gmail.com
Office: (219) 987-7338 Cell: (219) 242-1530

OAK BROOK OF CEDAR LAKE, IN
COTTAGE HOMES
GARAGE RIGHT -> 3 BEDROOM -> BASEMENT

PREPARED FOR:
SCHILLING CONSTRUCTION

DRAWN	SLR
CHECKED	
DATE	6-5-2023
SCALE	SHOWN
JOB NO.	2320-R
SHEET	A-3
OF	5 SHEETS

WHILE EVERY ATTEMPT HAS BEEN MADE IN PREPARATION OF THIS PLAN TO AVOID MISTAKES, S.L.R. DRAFTING SERVICE CAN NOT GUARANTEE AGAINST HUMAN ERROR. THE CONTRACTOR AND OWNER MUST CHECK ALL DIMENSIONS, DETAILS, AND JOB SITE CONDITIONS AND BE RESPONSIBLE FOR THEM. WRITTEN DIMENSIONS WILL TAKE PRECEDENCE OVER SCALED DIMENSIONS. S.L.R. DRAFTING SERVICE SHALL NOT BE HELD RESPONSIBLE FOR CONSTRUCTION METHODS OR MEANS BY THE CONTRACTOR AND/OR/ ANY SUBCONTRACTOR AND THEIR TRADESMAN.

LIGHT & VENTILATION SCHEDULE

ROOM NAME	ROOM SQ. FT.	LIGHT REQ'D 8%	VENT REQ'D 4%	LIGHT ACTUAL	VENT ACTUAL
GREAT	300.0	24.0	12.0	21.0	12.0
DIN/KIT	272.2	21.7	10.8	47.6	24.7
LAUNDRY	57.7	4.6	2.3	7.6	4.6
BEDRM#2	149.8	11.9	5.9	21.0	12.0
M.BEDRM	181.1	14.4	7.2	28.5	12.0
M.BATH	85.5	6.8	3.4	ART	EXHFAN
BEDRM#3	138.3	11.0	5.5	21.0	12.0
BATH#2	46.6	3.7	1.8	ART	EXHFAN
BASEMENT REQUIRES 2% LIGHT & VENTILATION- SHALL BE IN WINDOWS OR BY MECHANICAL MEANS- VERIFY WITH LOCAL CODES.					
BSMT.	1578.5	31.5	31.5	15.5	11.4

EGRESS WINDOWS

A MINIMUM OF ONE WINDOW IN EACH BEDROOM SHALL MEET THE FOLLOWING CRITERIA.

A. 22" MIN. NET CLEAR OPENING HEIGHT
B. 20" MIN NET CLEAR OPENING WIDTH
C. 5.7 SQ. FT. MIN. NET CLEAR OPENING
D. SILL TO FLOOR HEIGHT OF NOT MORE THAN 44"

ALL HABITABLE ROOMS SHALL BE PROVIDED WITH AGGREGATE GLAZING AREA OF NOT LESS THAN 8 PERCENT OF FLOOR AREA OF SUCH ROOM. THE MINIMUM OPENABLE AREA TO THE OUTDOORS SHALL BE 4 PERCENT OF THE FLOOR AREA BEING VENTILATED.

WINDOW BRAND SHALL BE ANDERSEN 200 SERIES
AS STATED BY NUMBERS ON FLOOR PLAN(S). D.H.

⊙ EGRESS WINDOWS
◪ TEMPERED SAFETY GLASS

DESIGN LOADS

MAIN FLOOR LIVING = 40 LIVE, 10 DEAD psf
SLEEPING ROOMS = 30 LIVE, 10 DEAD psf
ATTICS - LIMITED STORAGE = 20 LIVE, 10 DEAD psf
ROOFS = 30 LIVE, 10 DEAD psf
ROOF TRUSSES:
TOP CHORD = 30 LIVE, 10 DEAD psf
BOTTOM CHORD = 20 LIVE, 10 DEAD psf

OWNER SHALL BE RESPONSIBLE TO HIRE A CERTIFIED TESTING LAB TO ASCERTAIN EXISTING SOIL CONDITIONS AND BEARING CAPACITY. CONTRACTORS SHALL MODIFY FOOTINGS AND FOUNDATION WALLS IF REQUIRED PER CERTIFIED SOIL REPORT.
MIN. ALLOWABLE SOIL PRESSURE TO BE 2000 PSF.

HEADER SIZES

ALL WINDOWS, EXTERIOR DOORS AND INTERIOR BEARING WALL HEADERS SHALL BE 2-2X12 W/1/2" X 11" PLYWOOD PLATE.
ALL NON-BEARING WALL HEADERS SHALL BE 2-2X4, 3'-6" MAX LENGTH. 2-2X6, 4'-6" MAX LENGTH. 2-2X8, 6' -9" MAX LENGTH. UNLESS OTHERWISE NOTED.

ATTIC VENTILATION

THE NET FREE VENTILATION AREA SHALL NOT BE LESS THAN 1 TO 150 OF THE AREA OF THE SPACE VENTILATED EXCEPT THAT THE AREA MAY BE 1 TO 300, PROVIDED AT LEAST 50% AND NOT MORE THAN 80% OF THE REQUIRED VENTILATING AREA IS PROVIDED BY VENTILATORS LOCATED IN THE UPPER PORTION OF THE SPACE TO BE VENTILATED AT LEAST 3 FEET ABOVE THE EAVE OR CORNICE VENTS WITH THE BALANCE OF THE REQUIRED VENTILATION PROVIDED BY THE EAVE OR CORNICE VENTILATORS.
PROVIDE TOTAL MIN. 5.7 SQ. FT. NET FREE VENTILATORS FOR ENCLOSED HOUSE ATTIC.
PROVIDE MIN. 2.9 SQ. FT. AT ROOF RIDGE AND MIN 2.9 SQ. FT. AT EAVE.
ABOVE BASED ON 1/300 OF 1708 SQ. FT. WITH VAPOR BARRIER HAVING A TRANSMISSION RATE NOT EXCEEDING (1) ONE PERM IS INSTALLED ON THE WARM SIDE OF THE CEILING.
PROVIDE 9 MIN. ALUM. ROOF VENTS W/ 51 SQ. IN. FREE AREA EACH OR 24 LINEAL FEET OF CONTINUOUS RIDGE VENTS W/ 18 SQ. IN. FREE VENT AREA PER FOOT.
PROVIDE 16 MIN. 4" X 16" ALUM. SOFFIT VENTS W/ 27 SQ. IN. FREE AREA EACH.

SQUARE FOOTAGE

CALCULATED FROM OUTSIDE OF EXTERIOR WALL (FRAME AND/OR BRICK) AND DOES INCLUDE BALCONIES AND STAIRS. NOT INCLUDED ARE DECKS, PORCHES, GARAGES, BASEMENTS, ATTICS, AND FIREPLACES.

FIRST FLOOR 1708.5 ф

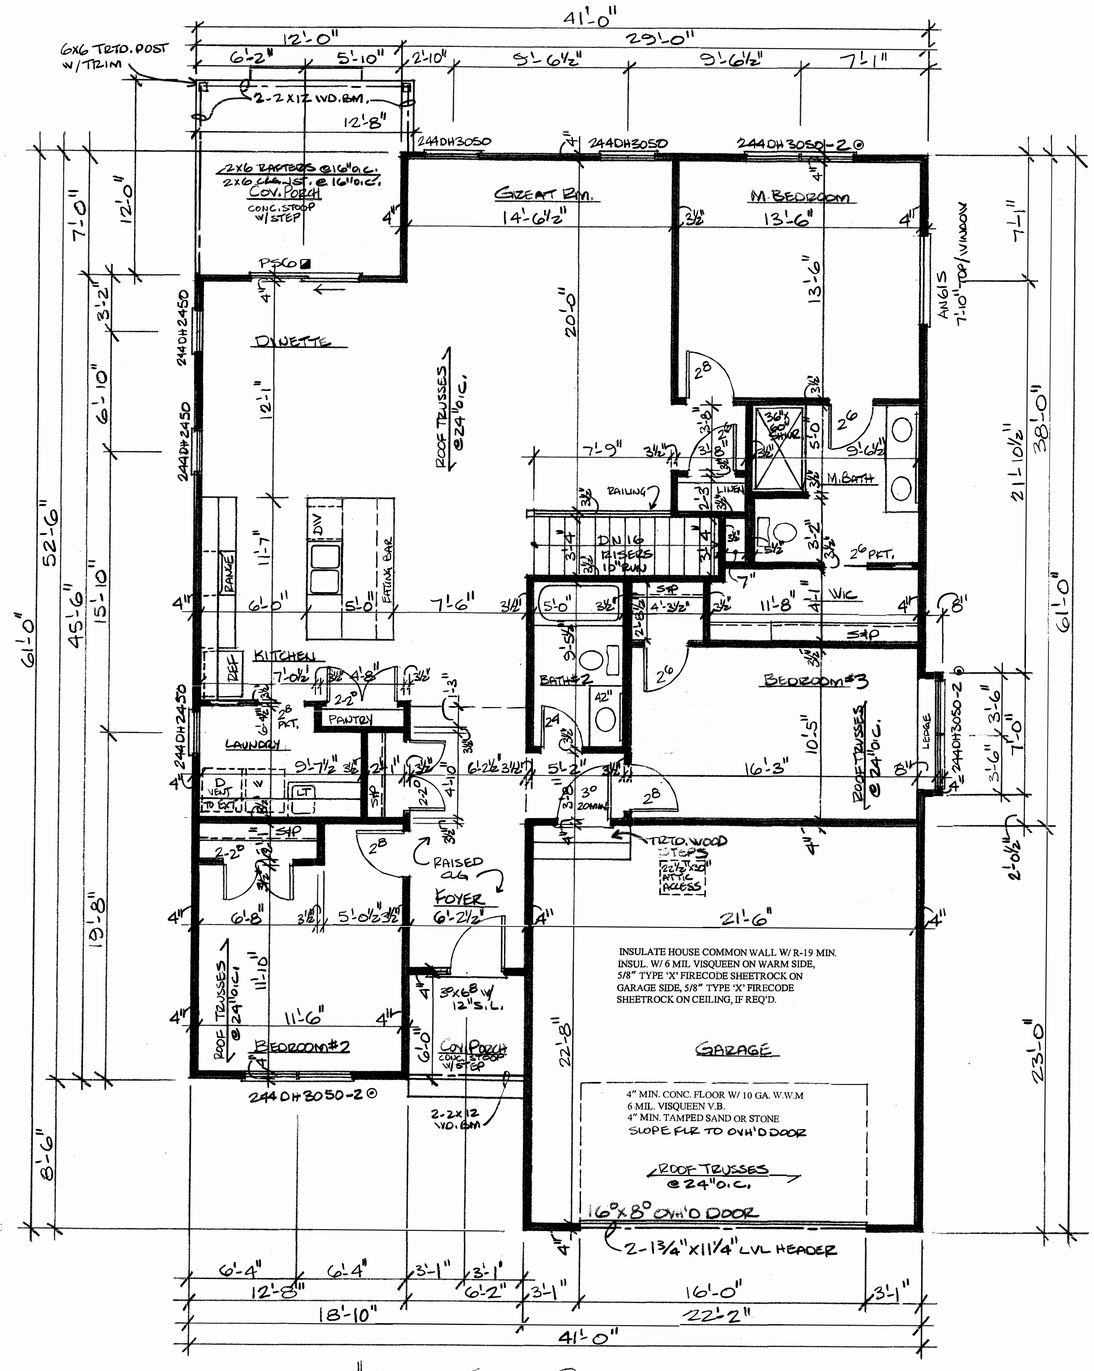

FIRST FLOOR PLAN 9° CLG'S
SCALE: 1/4" = 1'-0"

REVISIONS	BY
6-14-23	SLR
6-20-23	SLR
6-24-23	SLR
6-28-23	SLR
7-8-23	SLR

S.L.R DRAFTING SERVICE
RESIDENTIAL HOME DESIGN, ADDITIONS & REMODELS
Sharon L. Roach
slrdraftingservice@sbgmail.com
Office: (219) 987-7358 Cell: (219) 242-1530

OAK BROOK OF CEDAR LAKE, IN
COTTAGE HOMES
GARAGE RIGHT ~ 3 BEDROOM ~ BASEMENT

PREPARED FOR:
SCHILLING CONSTRUCTION

DRAWN	SLR
CHECKED	
DATE	
SCALE	SHOWN
JOB NO.	2320-R
SHEET	A-4
OF	5 SHEETS

WHILE EVERY ATTEMPT HAS BEEN MADE IN PREPARATION OF THIS PLAN TO AVOID MISTAKES, S.L.R. DRAFTING SERVICE CAN NOT GUARANTEE AGAINST HUMAN ERROR. THE CONTRACTOR AND OWNER MUST CHECK ALL DIMENSIONS, DETAILS, AND JOB SITE CONDITIONS AND BE RESPONSIBLE FOR THEM. WRITTEN DIMENSIONS WILL TAKE PRECEDENCE OVER SCALED DIMENSIONS, S.L.R. DRAFTING SERVICE SHALL NOT BE HELD RESPONSIBLE FOR CONSTRUCTION METHODS OR MEANS BY THE CONTRACTOR AND/OR/ ANY SUBCONTRACTOR AND THEIR TRADESMAN.

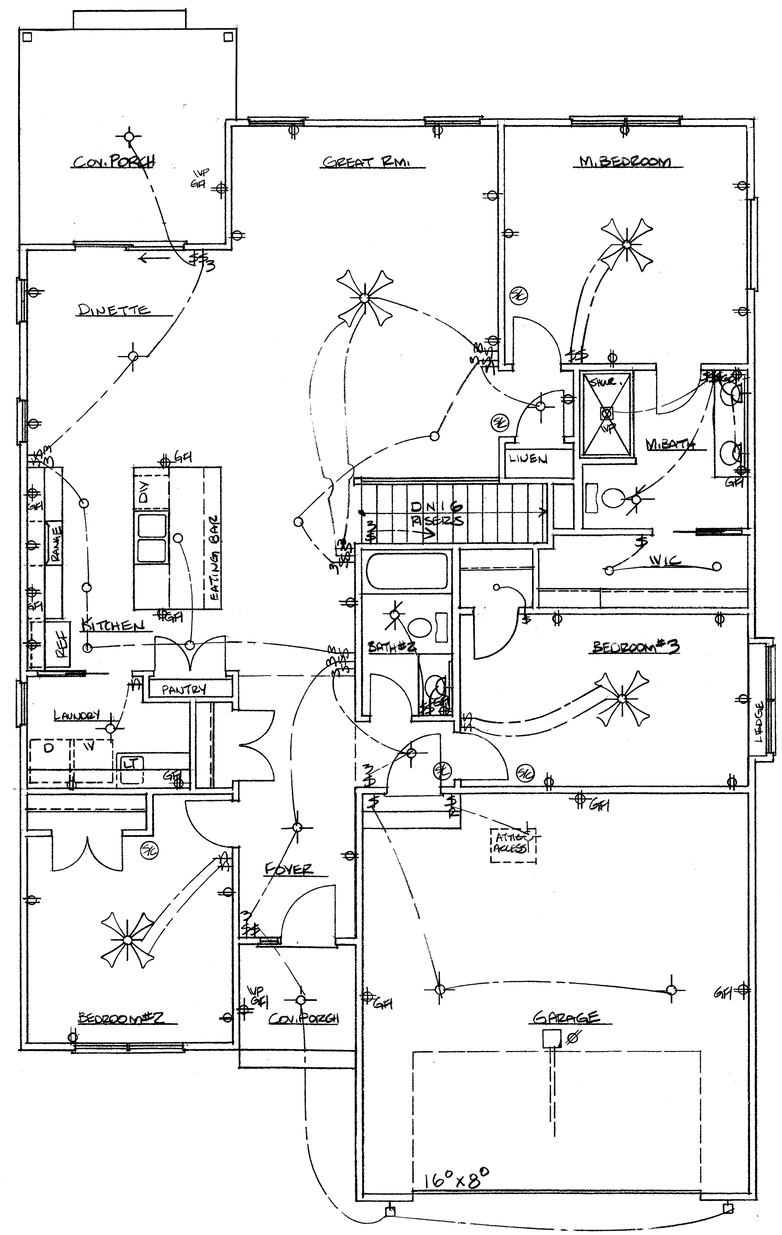

ELECTRICAL SYMBOL SCHEDULE

- SINGLE POLE SWITCH
- THREE-WAY SWITCH
- FOUR-WAY SWITCH
- DIMMER SWITCH
- SINGLE POLE SWITCH W/ RED PILOT LIGHT
- DUPLEX RECEPTACLE
- DUPLEX RECEPTACLE – SPLIT WIRED
- GROUND FAULT INTERRUPT RECEPTACLE
- PULL CHAIN FIXTURE
- CEILING MOUNTED LIGHT FIXTURE
- RECESSED CAN LIGHT FIXTURE
- RECESSED ADJUSTABLE CAN LIGHT FIXTURE
- CEILING MOUNTED PADDLE FAN
- EXHAUST FAN
- EXHAUST FAN & LIGHT
- WALL MOUNTED LIGHT
- EXTERIOR WALL MOUNTED LIGHT FIXTURE
- = GARAGE DOOR OPENER W/ LIGHT & ELECTRIC EYES
- S SMOKE DETECTOR – 110V W/ BATTERY BACKUP
- CO CARBON MONOXIDE DETECTOR

NOTE: ELECTRICAL LAYOUT SHOWN AS EXAMPLE ONLY. ACTUAL LAYOUT TO BE DETERMINED BY OWNER AND ELECTRICAL CONTRACTOR AS PER NATIONAL ELECTRICAL CODES.

FIRST FLOOR PLAN 9' CLG'S – ELECTRICAL

SCALE: 1/4" = 1' — 0"

REVISIONS	BY
6-14-23	SLR
6-20-23	SLR
6-24-23	SLR
6-28-23	SLR
7-8-23	SLR

S.L.R DRAFTING SERVICE
RESIDENTIAL HOME DESIGN, ADDITIONS & REMODELS
Sharon L. Roach
slrdraftingservice04@gmail.com
Office: (219) 997-7358 Cell: (219) 242-1530

OAK BROOK OF CEDAR LAKE, IN
COTTAGE HOMES
GARAGE RIGHT – 3 BEDROOM – BASEMENT

PREPARED FOR:
SCHILLING CONSTRUCTION

DRAWN	SLR
CHECKED	
DATE	6-5-2023
SCALE	SHOWN
JOB NO.	2320-R
SHEET	E-1

OF 5 SHEETS